



# G3

THE G3 DOESN'T JUST GO FAST  
IT GOES ANYWHERE



# Aero Performance



**Fully Internal Cable Routing – Sleek lines, reduced drag, pure speed.**

**Wind-Tuned Frame Geometry – Every tube shaped to slice through the air.**

**Integrated Thru-Axle & Aero Seatpost – Closed axle system with a sleek aero tail for maximum efficiency.**



# Gravel Capability



Up to 50C Tire Clearance – Unleash confidence on any terrain.

50T Chainring – Power through flats, dominate descents.

50T Chainring – Power through flats, dominate descents.



# G3



	G3 Standard	G3 Pro	G3 Ultra
Series	GRX 820 + ADVENTURE Bar + Grapid	GRX 825 + ADVENTURE Bar + Gryper	RIVAL AXS XPLR + ADVENTURE Bar + Gryper
<b>Complete Bike</b>			
Frame Material	T700 + T800 + M40	T700 + T800 + M40	T700 + T800 + M40
Drivetrain	Shimano GRX 820 Mechanical	Shimano GRX 825 Electronic	SRAM RIVAL AXS XPLR Electronic
Fork	Carbon Fiber Fork	Carbon Fiber Fork	Carbon Fiber Fork
Braking System	Hydraulic Disc Brakes	Hydraulic Disc Brakes	Hydraulic Disc Brakes
Wheelsset	Lún GRAPID 700C D38 Pillar 1420 Spokes	Lún GRYPHER 700C D35 Carbon (Spokes)	Lún GRYPHER 700C D35 Carbon (Spokes)
Speed	1×12-speed	1×12-speed	1×13-speed
Shifting	Mechanical	Electronic	Electronic
Handlebar	Integrated Carbon Handlebar	Integrated Carbon Handlebar	Integrated Carbon Handlebar
Frame Weight	Approx. 970g (raw)	Approx. 970g (raw)	Approx. 970g (raw)
Headset	1-1/2"	1-1/2"	1-1/2"
Tires	Domestic 700*47C Tubeless	Michelin Power Gravel 700x40C	Michelin Power Gravel 700x40C
<b>Drivetrain System</b>			
Crankset	Shimano GRX 820, 42T	Shimano GRX 825, 42T	SRAM RIVAL AXS XPLR, 42T
Cassette	Shimano GRX 820, 10-45T	Shimano GRX 825, 10-51T	SRAM RIVAL AXS XPLR, 10-46T
Chain	Shimano GRX 820, 12-speed	Shimano GRX 825, 12-speed	SRAM RIVAL AXS XPLR Chain
Rear Derailleur	Shimano GRX 820 RD-RX822	Shimano GRX 825 RD-RX827	SRAM RIVAL AXS XPLR Rear Derailleur
Shifters	Shimano GRX 820	Shimano GRX 825	SRAM RIVAL AXS XPLR

# G3



Lunar Grey



Pink Clay



Pearl White



Grape Soda




Caffe Macchiato



Carbon Black



# G3

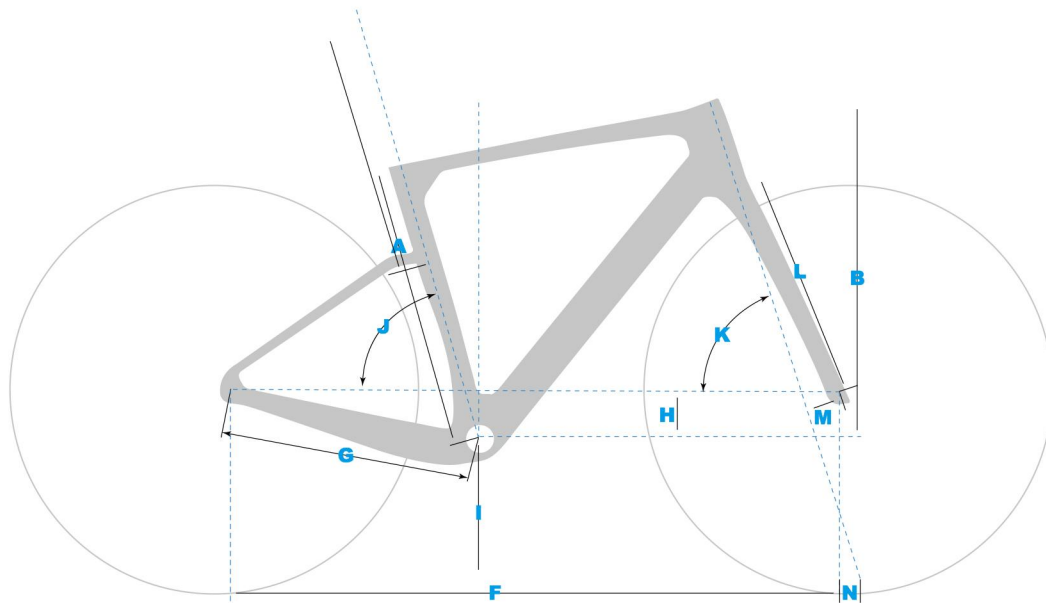

	<b>XS</b>	<b>S</b>	<b>M</b>	<b>L</b>	<b>XL</b>
<b>A</b> Seat Tube Length	440	460	480	510	540
<b>B</b> Stack	539	551	568	582	601
<b>C</b> Reach	363	370	377	388	399
<b>D</b> Top Tube Length	523	533	545	560	577
<b>E</b> Head Tube Length	120	130	145	160	180
<b>F</b> Wheelbase	1018	1024	1029	1045	1063
<b>G</b> Chainstay Length	430	430	430	430	430
<b>H</b> BB Drop	75	75	75	75	75
<b>I</b> BB Height	286	286	286	286	286
<b>J</b> Seat Tube Angle	73.5°	73.5°	73.5°	73.5°	73.5°
<b>K</b> Head Tube Angle	69.5°	70°	70.5°	70.5°	70.5°
<b>L</b> Fork Length	395	395	395	395	395
<b>M</b> Fork Rake	54	54	51	51	51
<b>N</b> Trail(45C)	72.7	69.6	69.5	69.5	69.5
<b>O</b> Seatpost Length	320	320	360	360	360
<b>P</b> Seatpost Setback	0	0	15	15	15
<b>Q</b> Standover Height	756	773	790	815	838
Tire	700C*50	700C*50	700C*50	700C*50	700C*50
STR	1.48	1.49	1.51	1.50	1.51

\*The frame size should be selected based on the actual hip height, supplemented by height. Height is for reference only. It is recommended to collect fitting data to make an accurate choice